

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

103040000

Articol:

FEKA VS 550 M - A

Date pompa

Free passage : 50 mm

Presiune nominala:

Temperatura min. fluid 0

Temperatura max. fluid 50 °C

Temperatura max. ambianta 40 °C

Date de functionare cerute

Debit : 0 m3/h

Înaltime de pompare : 0 m

Fluid pompat : Apă

Temperatura fluid: 20 °C

Densitate 0.99819 kg/dm3

Vascozitate cinematica: 1.0004 mm2/s

Presiune de vapori: 2.2045 kPa

Date disponibile:

Debit :

Înaltime de pompare :

Materiale

Corp pompa AISI 304

Rotor AISI 304

Arbore motor AISI 316



Disc suport etansare AISI 304

Carcasa motorului AISI 304

Calota de protectie AISI 304

Etansare mec. completa pe partea de pompare Silicon carbide/Silicon carbide

Curve tolerance according to ISO 9906

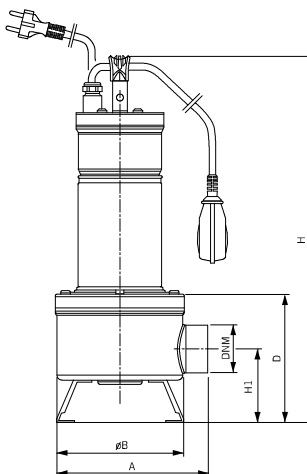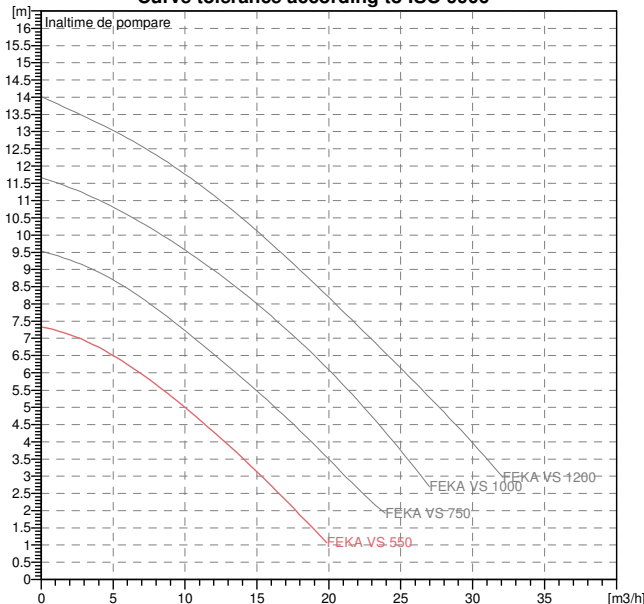

Date motor

Masa 16.3 kg

Dimensiuni de gabarit mm

Marca : DAB

Putere nominala P2: 0.55 kW

Viteza nominala: 2800 1/min

Tensiune nominala : 1~ 220-240 V

50 Hz

Curent nominal : 4.2 A

Grad de protectie: IP 68

A 203

B 170

D 172

DNM 2" F

H 492

H1 98

Racorduri pompa:

Partea cu aspiratia: /

Partea cu refularea: 2 " F / --


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

FEKA VS 550 M - A

Curve tolerance according to ISO 9906

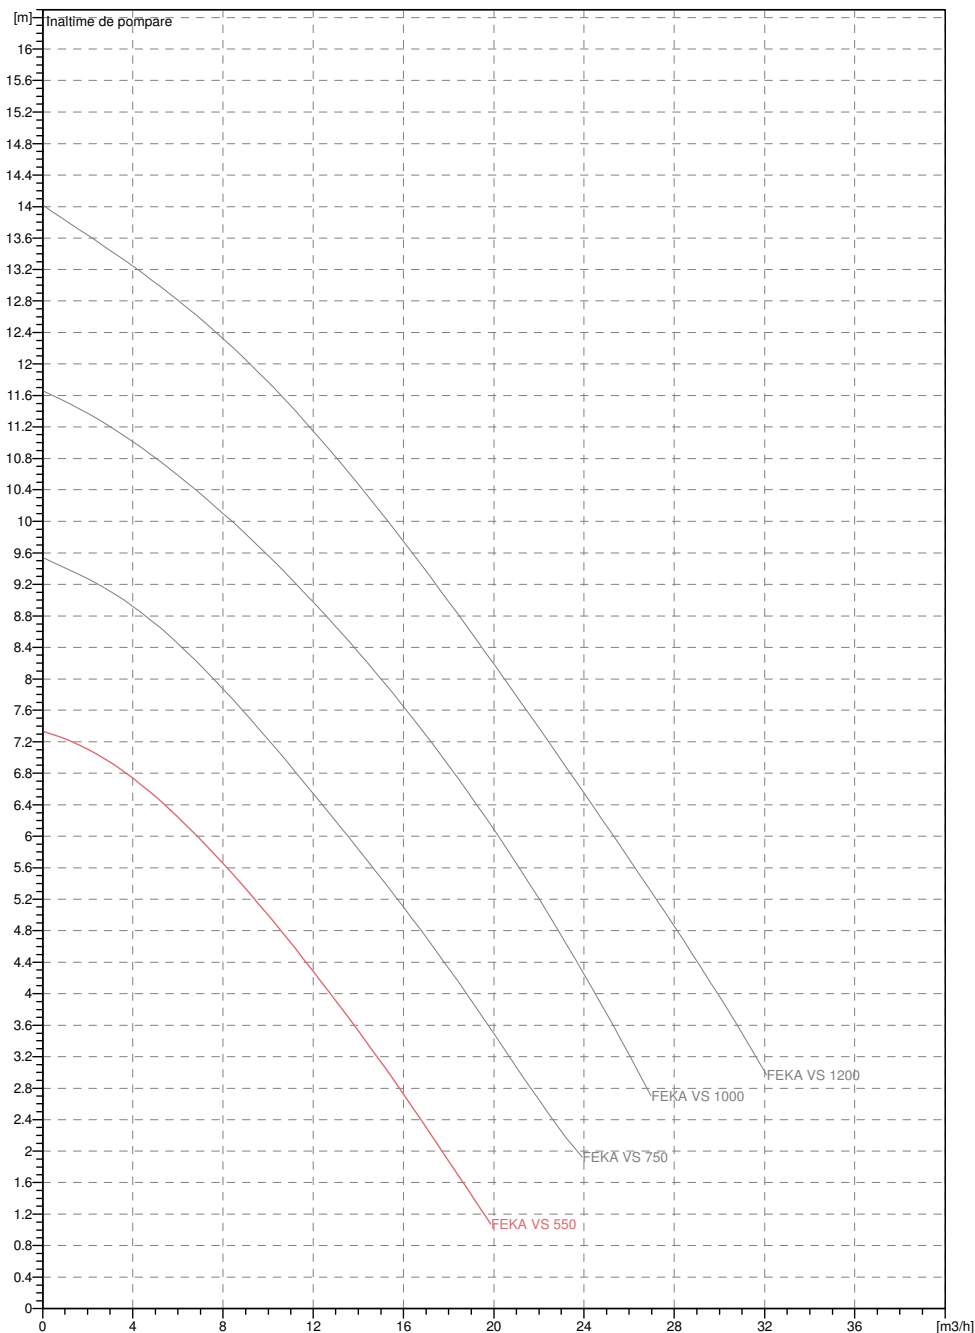

Date disponibile:

Partea cu aspiratia:

Partea cu refularea:

Debit :

Înălțime de pompare :

Viteză nominală:

2 " F

0 m³/h

0 m

2800 1/min

Oferta

ID oferta

Creat de

Creat


08/21/2019

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

FEKA VS 550 M - A

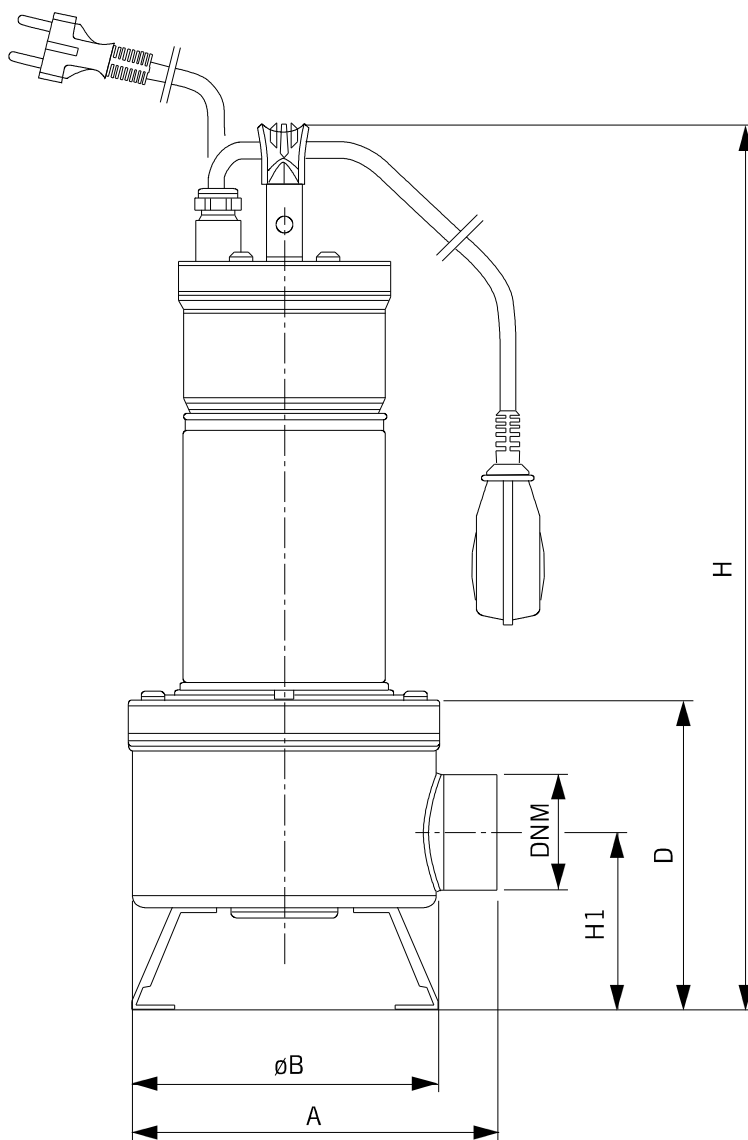

Dimensiuni in mm						Racorduri pompa:		
1	A	203				Aspiratie Refulare 2 " F --		
2	B	170						
3	D	172						
4	DNM	2" F						
5	H	492						
6	H1	98						
Oferta			ID oferta			Creat de		Creat
								08/21/2019