



E-Bormio

Technical sheet







PIPES: 13

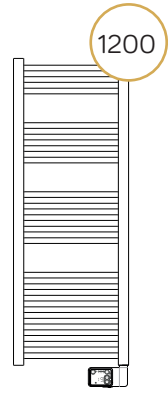


PIPES: 20

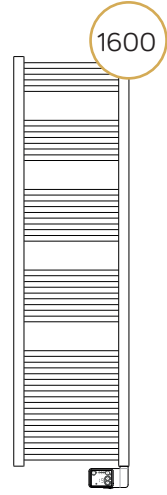

PIPES: 27

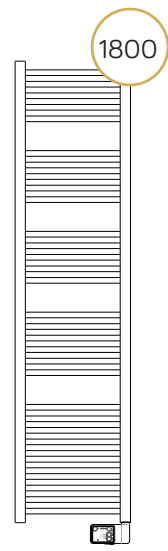


PIPES: 31




| Description | Straight |
|-----------------------------------|--|
| Material | Carbon steel |
| Pipes - Ø | 22x0,9 |
| Collectors - mm | 40x30x1,5 - «D» shape |
| Wall fixings | 3 |
| Max temperature | 75 °C |
| Paint | Epoxypolyester powder |
| Packaging | Cardboard box and protections |
| Protection rate | IP24 |
| Electrical insulation | Class 2 |
| Power source | 230V - 50Hz |
| Heating element protection system | Overtemperature cut-out |
| Wire | Straight with shuko plug. Length approx. 1000 mm |
| Standard equipment | 1 kit wall fixing brackets |

Wall distance



| | |
|------|-----|
| Min. | Max |
| 85 | 95 |

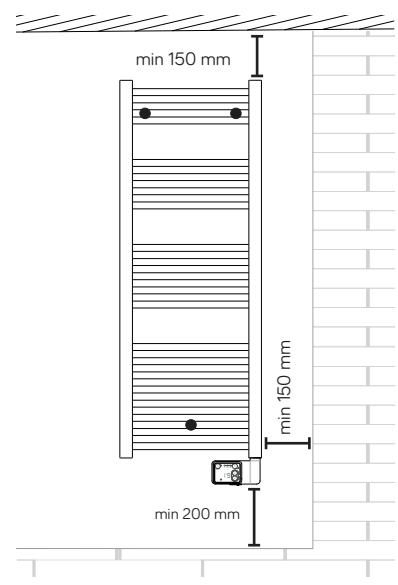

White RAL 9016 - straight

| Code | Height mm | Width mm | Weight kg | Heating element watt | Heating element kcal/h | Heating element btu | Overtemperature °C |
|--------|--------------|-------------|--------------|-------------------------|---------------------------|------------------------|-----------------------|
| 389949 | 800 | 500 | 9,1 | 300 | 258 | 1024 | 90 °C |
| 389950 | 1200 | 500 | 13,6 | 500 | 430 | 1706 | 105 °C |
| 389997 | 1200 | 600 | 15,4 | 600 | 516 | 2048 | 105 °C |
| 389951 | 1600 | 500 | 18,1 | 750 | 645 | 2559 | 100 °C |
| 389998 | 1600 | 600 | 20,5 | 900 | 774 | 3071 | 105 °C |
| 389999 | 1800 | 600 | 23,3 | 1000 | 860 | 3412 | 105 °C |

MAIN FUNCTIONS OF THE DIGITAL THERMOSTAT

