


CLRP POLYAMIDE WASHABLE CARTRIDGES



The CLRP polyamide washable cartridge is designed to protect boilers, washing machines, to filter sand, scale, rust. Versatile industrial use includes protecting water pumps, irrigation, gardening and car wash services.

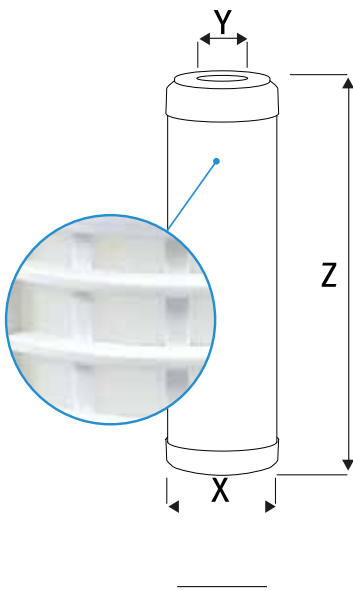

KEY FEATURES

- Uniform flow and low pressure drop due to cylindrical shape
- Easy to wash under running water
- High pressure resistance thanks to the honeycomb structure
- Suitable for drinking water treatment
- Produced without any glue or sealant addition
- Complies with DM25 standards (ITALY)

made in 
ITALY

Model	CLRP
Filtration	Sediments
Filtering medium	Polyamide
Inter core	Polypropylene
Valves	Polypropylene
Gasket	Elastomer
Connection	DOE
Working temperature	From 4°C (39°F) to 45°C (113°F)
Cartridge type	Washable
Maintenance	Quarterly
Duration	24 months

Code	Size	Filtration rating, μ	Flow rate, l/h	Z	X	Y	Pieces in box
FCLRPD0005	5"	50	1 100	12.7 cm	7.0 cm	2.8 cm	48
FCLRPD0010		250					
FCLRPD0015	7"	50	1 500	17.8 cm	7.0 cm	2.8 cm	24
FCLRPD0020		250					
FCLRPD0025	9" ¾	50	2 200	24.8 cm	7.0 cm	2.8 cm	
FCLRPD0030		250					