


# Cortina Analogic

Technical sheet


CE



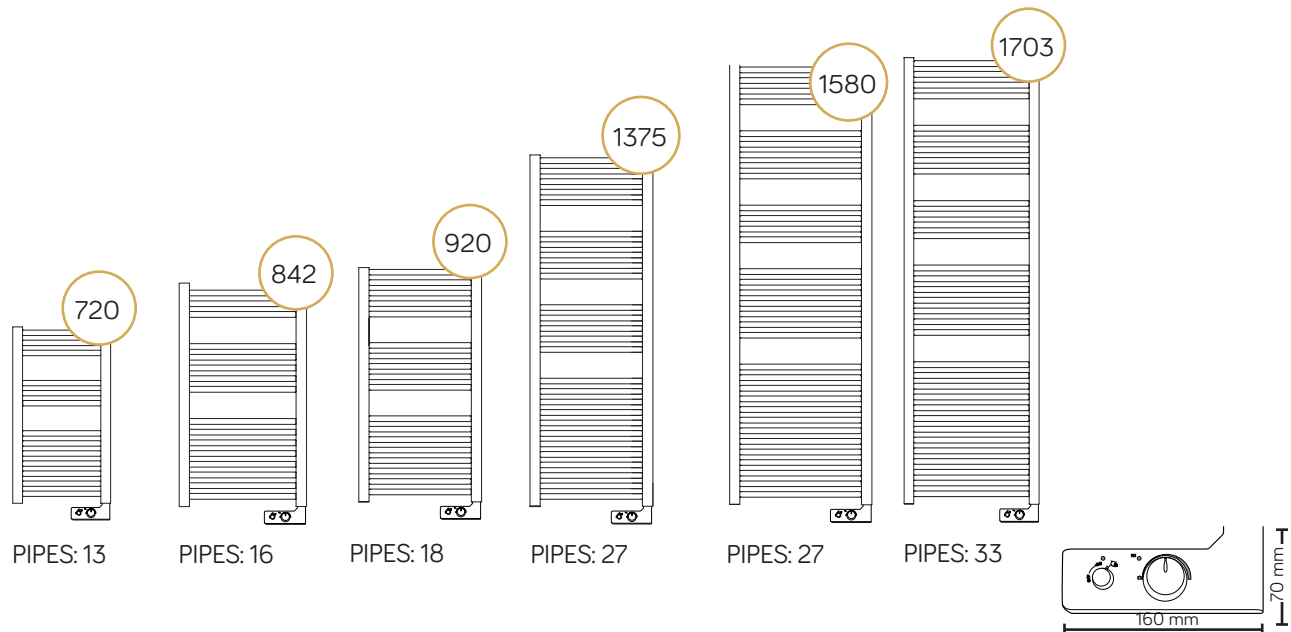


Description	Straight
Material	Carbon steel
Pipes - Ø	22x0,9
Collectors - mm	40x30x1,5 - «D» shape
Wall fixings	3
Max temperature	75 °C
Paint	Epoxypolyester powder
Packaging	Cardboard box and styrofoam protections
Protection rate	IP24
Electrical insulation	Class 2
Power source	230V - 50Hz
Heating element protection system	Overtemperature cut-out
Wire	Straight with shuko plug. Approx. length 1000 mm ca.
Standard equipment	1 kit wall fixing brackets

Wall distance

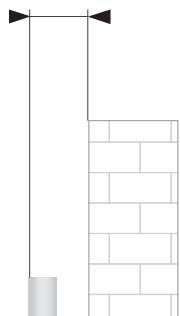

Min.	Max
85	95

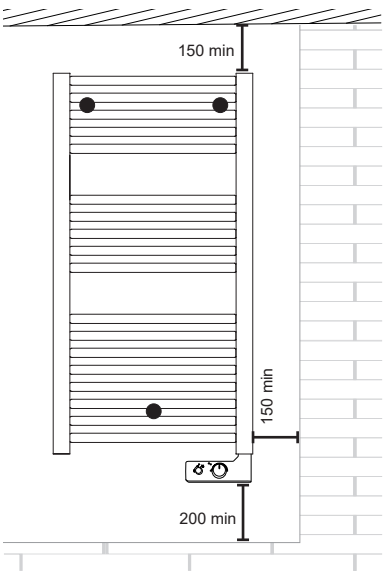

White RAL 9016 - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C
388088	720	400	7,7	300	258	1024	90
388089	920	480	9,4	500	430	1706	95
388090	1375	480	14,7	750	649	2559	100
388091	1703	550	22,1	1000	860	3412	105

Anthracite VOV12 - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C
380080	720	400	7,7	300	258	1024	90
380081	920	480	9,4	500	430	1706	95
380082	1375	480	14,7	750	649	2559	100
380083	1703	550	22,1	1000	860	3412	105

Chrome - straight

Code	Height mm	Width mm	Weight kg	Heating element watt	Heating element kcal/h	Heating element btu	Overtemperature °C
381875	842	500	10,3	300	1024	1024	90
382336	1375	480	14,7	500	430	1706	95
382337	1580	600	24,1	750	649	2559	100

MAIN FUNCTIONS OF THE ANALOGIC THERMOSTAT

