

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

60165319

Articol:

GENIX 110

Date pompa

Temperatura min. fluid	0 °C
Temperatura max. fluid	50 °C
Temperatura max. ambienta	25 °C
Temperatura min. ambienta	5 °C
Max Flow :	6,9 m³/h
Max. Head :	8 m
Max. Head (EN12050-3) :	6 m

Date de functionare cerute

Debit :	
Înălțime de pompare :	
Fluid pompat :	Dirty water
Temperatura fluid:	20 °C
Densitate	998 kg/m³
Vascozitate cinematica:	1 mm²/s
Presiune de vapori:	

Date disponibile:

Debit :	
Înălțime de pompare :	



Materiale

Rotor	Polypropylene 30% fiber glass
Cisterna	Polypropylene 30% Barium
Arbore	Otel inox
Cover	Otel inox
Soundproofing (COMFORT)	Polypropylene 70% Barium
Grinder	AISI 304/420
Garnitura OR	NBR

Date motor

Marca :	DAB	
Putere nominala P2:	0,32 kW	
Viteza nominala:	2.900 1/min	
Tensiune nominala :	1~ 230 V	50 Hz
Curent nominal :	2,3 A	
Grad de protecție:	IP 44	

Curve tolerance according to ISO 9906

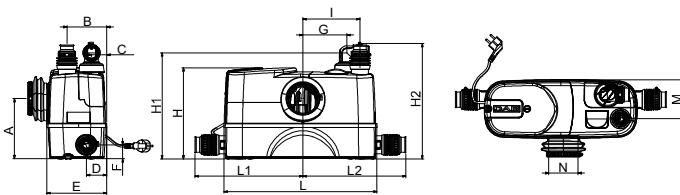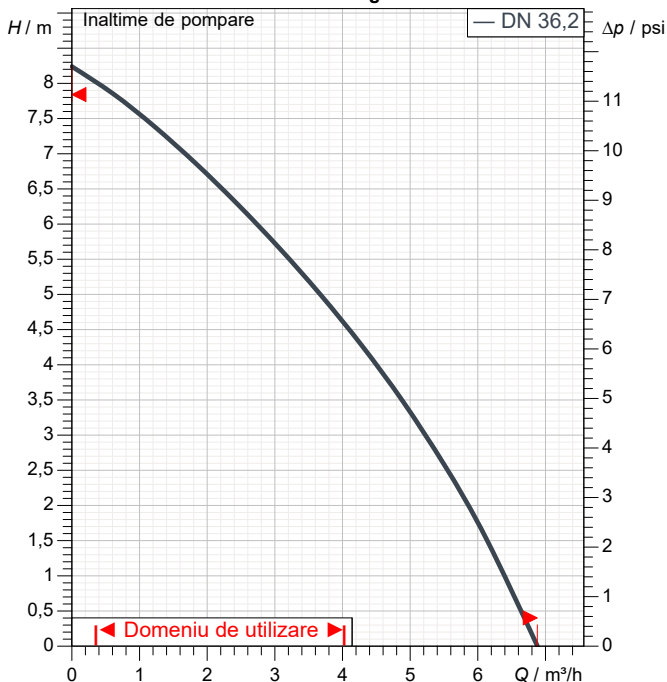

Masa 10,3 kg

Dimensiuni de gabarit mm

A	183	G	178	M	118		
B	118	H	277	N	87		
C	45	H1	323				
D	-	H2	351				
E	178	I	170				
F	-	L	456				

Racorduri pompa:

DN 22/25/28/32/36/40



DESEN DIMENSIONAL

11/27/2015

Pagina 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

GENIX 110

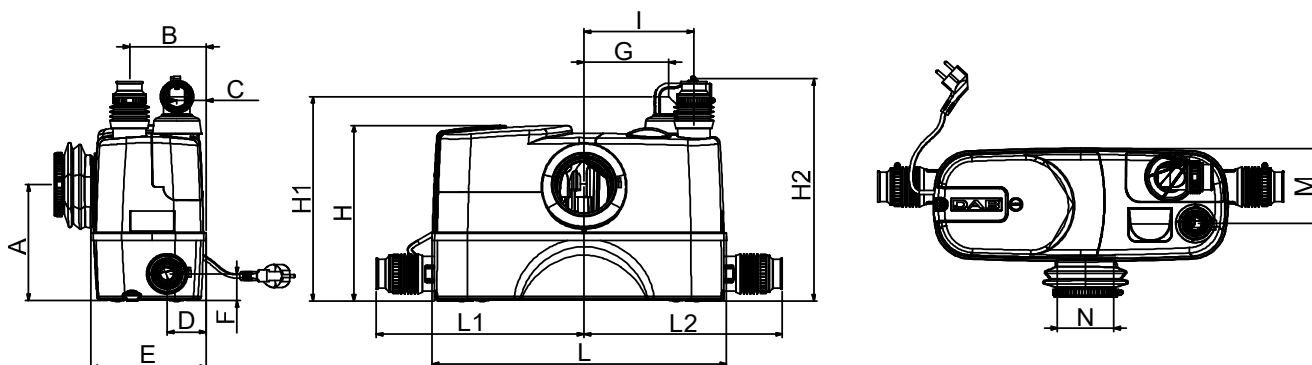

Dimensiuni in mm

Racorduri pompa:

1	A	183	M	118				
2	B	118	N	87				Aspiratie
3	C	45						
4	D	-						
5	E	178						
6	F	-						
7	G	178						
8	H	277						
9	H1	323						
10	H2	351						
11	I	170						
12	L	456						
								Refulare

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE