

Destinatar

Firma
Referinta
Adresa
Phone
Fax
E-mail

Expeditor

Cod articol :

101110400

Articol:

KPF 30/16 M

Date pompa

Diametru rotor: 0 mm
Presiune nominala: 6 bar (600 kPa)
Temperatura min. fluid -10 °C
Temperatura max. fluid 50 °C
Temperatura max. ambianta 40 °C

Date de functionare cerute

Debit : 0,00 m3/h
Înaltime de pompare : 0,00 m
Fluid pompat : Ap
Temperatura fluid: 20 °C
Densitate 0,99819 kg/dm3
Vascozitate cinematica: 1,0004 mm2/s
Presiune de vapori: 2,20 kPa



Date disponibile:

Debit :
Înaltime de pompare :

Materiale

Corp pompa Fonta 200 UNI ISO 185
Rotor Alama P Cu Zn40 Pb2 UNI 5705/65
Arbore cu rotor AISI 416 X12 CrS 13 UNI 6900/71
Suport Fonta 200 UNI ISO 185
Etansare mecanica Carbon/Ceramica
Garnitura OR NBR

Curve tolerance according to ISO 9906

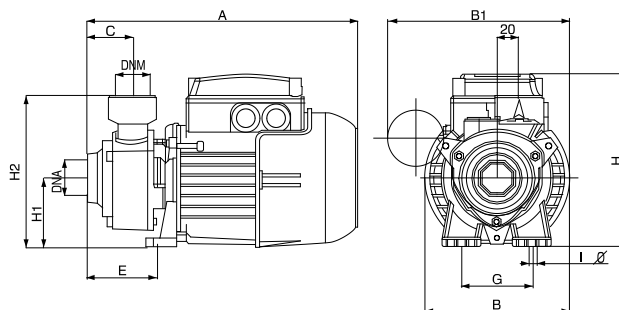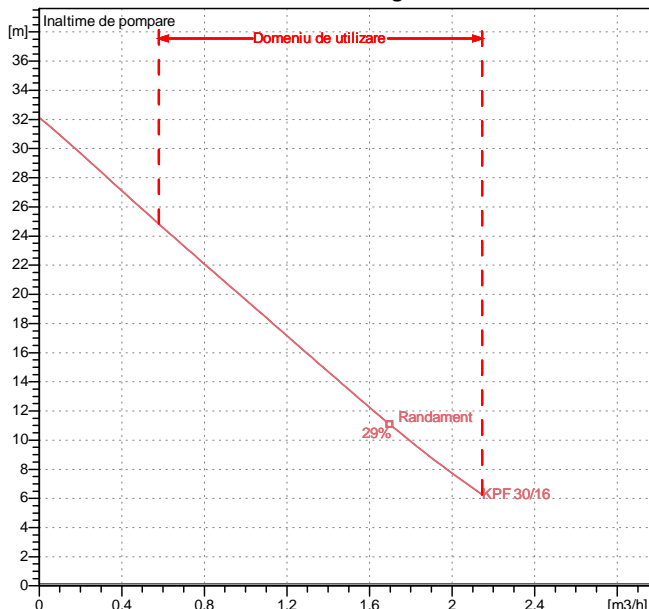

Masa 5,4 kg

Date motor

Marca : DAB
Putere nominala P2: 0,37 kW
Viteza nominala: 2800 1/min
Tensiune nominala : 1~ 220-240 V 50 Hz
Curent nominal : 2,37 A
Grad de protec ie: IP 44

Dimensiuni de gabaritm

A 247
B 132
B1 165
C 42
DNA 1" G
DNM 1" G
E 64
G 65
H 158
H1 63
H2 138
IO 8

Racorduri pompa:

Partea cu aspiratia: 1 " G / 6 bar (600 kPa)
Partea cu ref ularea: 1 " G / 6 bar (600 kPa)


Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

KPF 30/16 M

Curve tolerance according to ISO 9906

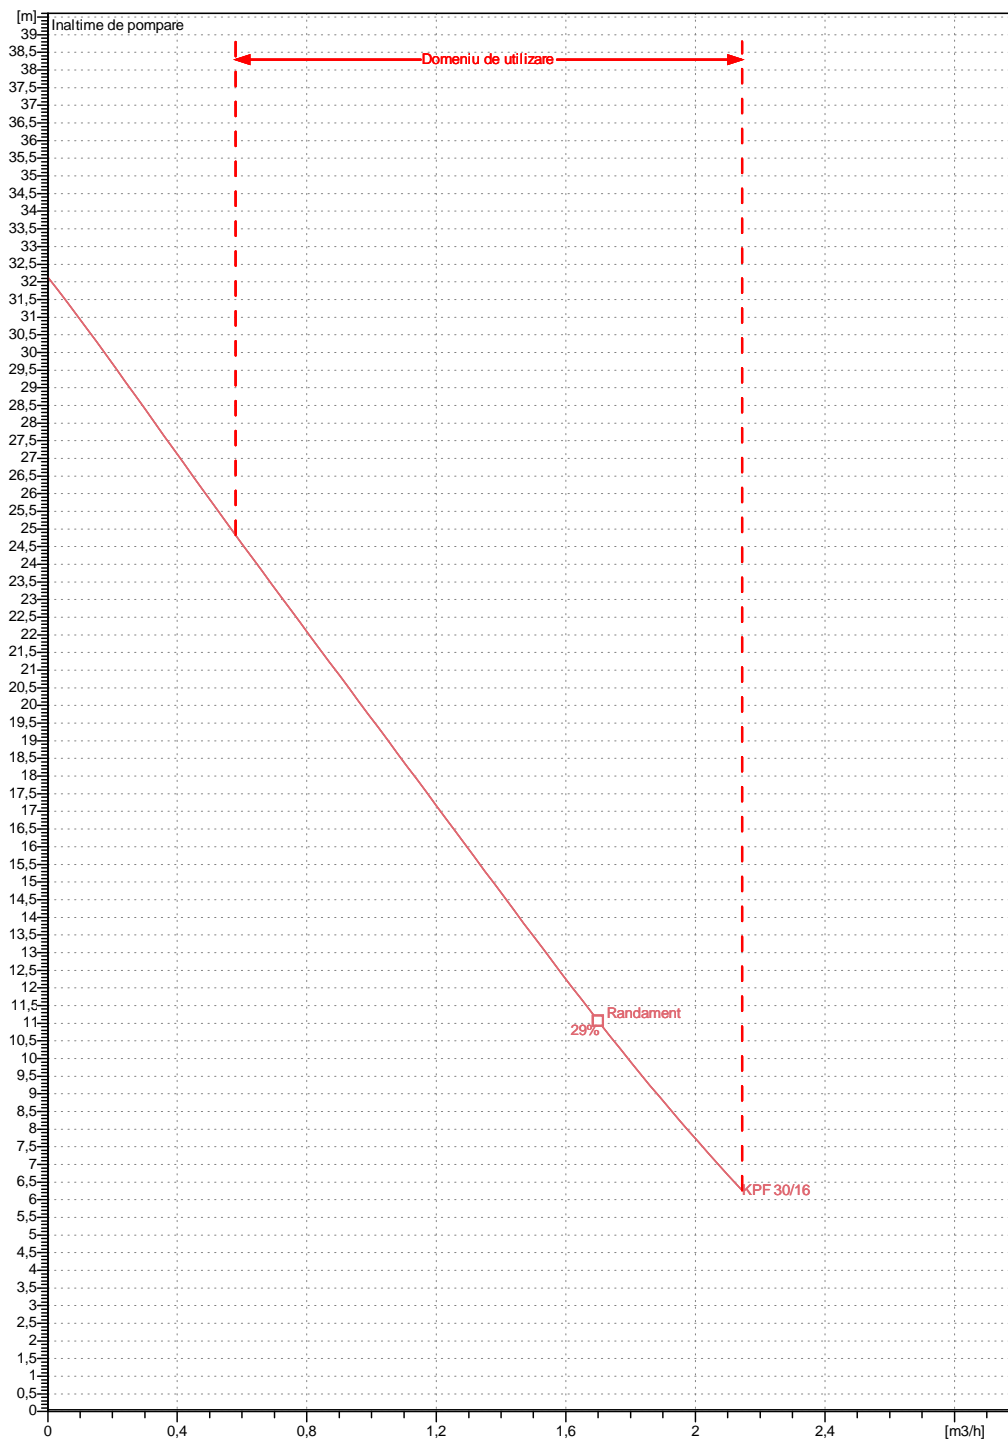

Date disponibile:


Partea cu aspiratia: 1 " G 6 bar (600 kPa)	Partea cu refularea: 1 " G 6 bar (600 kPa)	Debit : 0 m3/h	Inaltime de pompare : 0 m	Viteza nominala: 2800 1/min
Oferta	ID oferta	Creat de	Creat	06/10/2020

Destinatar

Expeditor

Firma
Referinta
Adresa
Phone
Fax
E-mail

KPF 30/16 M

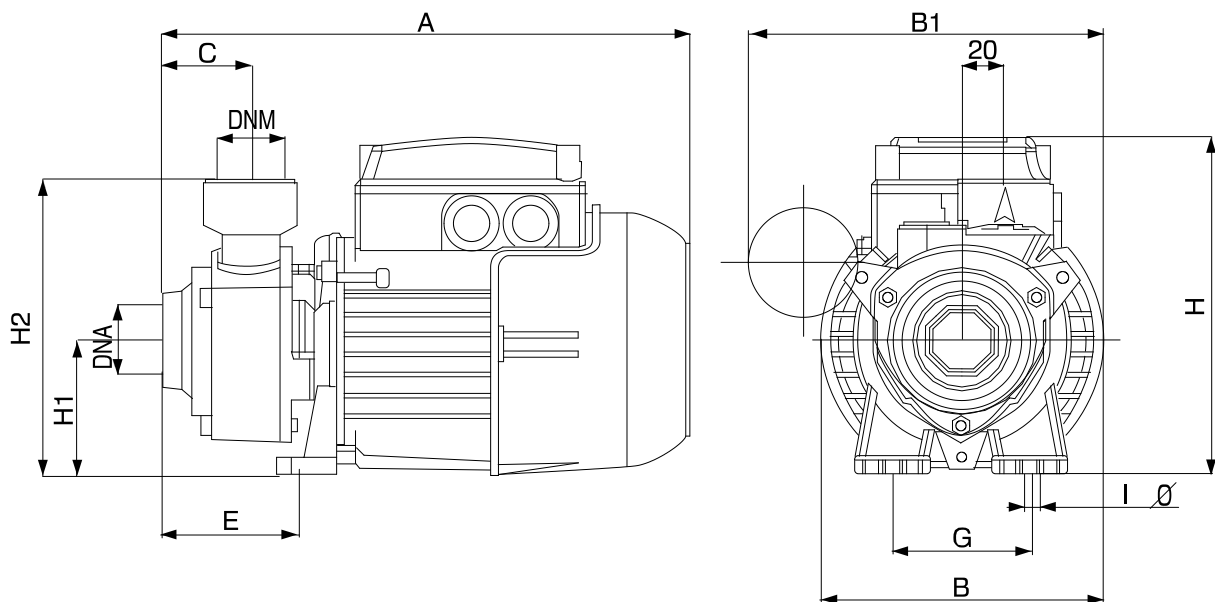

Dimensiuni in mm

1	A	247
2	B	132
3	B1	165
4	C	42
5	DNA	1" G
6	DNM	1" G
7	E	64
8	G	65
9	H	158
10	H1	63

H2
I O

138
8

Racorduri pompa:

Aspiratie
1 " G
6 bar (600 kPa)

Refulare
1 " G
6 bar (600 kPa)

Oferta

ID oferta

Creat de

Creat

06/10/2020