




BILIGHT WITH A CLASSIC HEAT EXCHANGER

GCVS 100 44 20 B11 TSRC

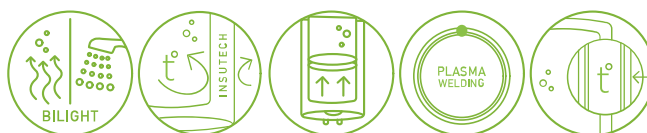

Model	BiLight 100 SE
Real Volume	98 L
Rated power	2000 W
Heating time Δt 45K (15 - 60°C)**80°C	0:45 h:min
Energy class	C
Height	0.985 m



Width	0.440 m
Depth	0.467 m
Diameter	440 mm
Mounting	Vertical
Heat exchanger surface	0.28 m ²
Heat exchanger capacity	1.2 L
Continuous flow rate of DHW at ΔT 35°C *60-80°C	142 L/h
Exchange power in continuous mode (max. coil output) *60-80°C	6 kW
Standing losses	64 W